

Vivitar®

Macro-Focusing Zoom Lens

Macro-Zoom Objektiv

Objectif zoom à mise au point macro

Objetivo zoom de macro enfoque

Instruction Sheet


Gebrauchsanweisung

Fiche d'instructions

Instrucciones

75-205mm

f3.8

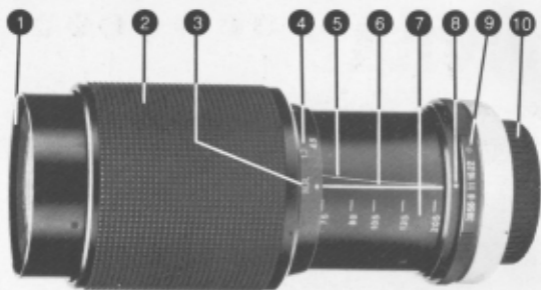

- ① **Accessory Thread.** Accepts 62mm threaded accessories such as filters and lens hoods.
- ② **Zoom/Focus Ring.** Turn the Zoom/Focus Ring to focus; slide the Zoom/Focus Ring along the lens barrel to change focal length.
- ③ **Macro Range Position.** Closest focusing distance for achieving maximum reproduction ratios.
- ④ **Distance Scales.** The white scale shows the distance in feet; the green scale shows the distance in meters.
- ⑤ **Infrared Focus Line.** Infrared radiation focuses on a different plane than light. When using infrared film, focus normally, then move the distance setting from the Distance Index Line to the Infrared Focus Line.
- ⑥ **Distance Index Line**
- ⑦ **Focal Length Settings**
- ⑧ **Aperture Index Point**
- ⑨ **Aperture Ring and Scale**
- ⑩ **Lens Mount.** Your new Vivitar zoom is designed to fit your camera with ease and precision. Simply slide the Zoom/Focus Ring to the 75mm position and mount the lens (holding the lens barrel) as you would your normal lens.

Automatic Diaphragm Control

The automatic diaphragm of your lens allows you to focus and compose your pictures with the diaphragm "wide open" (at maximum aperture). It will automatically stop down to the preselected aperture at the moment of exposure and immediately re-open as the exposure is completed.

NOTE: Universal Thread Mount lenses have an "Auto/Manual Switch" located on the lens mount. This switch must be set to the "A" (auto) position for Automatic Diaphragm Control. In the "M" (manual) position, the diaphragm opens and closes as the Aperture Ring is turned.

EE Coupled Lenses

Canon: Canon Mount lenses have a click stop at the green "O" for EE operation. The Aperture Ring may be set and removed from this position in the same manner as selecting a specifically marked f-stop.

Minolta: On Minolta Mount lenses the minimum aperture setting (f22) is engraved in green. When using this lens in the shutter priority mode (on Minolta cameras having this feature) the lens must be set at this minimum aperture position.

Using the Macro Range Setting

First, align the yellow "M.R." on the Zoom/Focus Ring with the Distance Index Line. Next, move your camera and lens toward your subject until the image comes into sharp focus. You'll then be able to continuously change your reproduction ratio by changing zoom settings. There's no need to refocus.

NOTE: "Reproduction ratio" refers to the relationship between the size of your subject and the size of its image on film. For example, a reproduction ratio of 1:4 means that the size of the image on film is $\frac{1}{4}$ life-size. At 75mm your reproduction ratio is 1:11 — $\frac{1}{11}$ life size. Zooming to 205mm increases your reproduction ratio to 1:4. By adding the optional Vivitar 75–205mm 2X Matched Multiplier your focal length range will be changed to 150–410mm, with reproduction of 1:5.5 at 150mm and a full 1:2 at 410mm. Ask your photo dealer for more information about this useful accessory.

Lens Care

1. It's a good idea to keep a Skylight 1A or UV filter on your lens at all times to protect the front element from fingerprints and scratches.
2. Keep your lens dust free by making sure both the front and rear lens caps are in place when it's not in use.
3. Clean your lens only when necessary, using only tissues, brushes, cleaners, etc. made specifically for photographic lenses. Never rub the lens surface with your finger, clothing, or any other abrasive material.
4. Always store your lens in a cool, dry place. In humid weather, it's best to store it with the supplied packet of silica gel.

Specifications

Optical Construction: 12 elements, 8 groups

Angles of Acceptance: 32°–12°

Aperture Range: f3.8–f22

Minimum Focusing Distance from Film Plane: 1.2m (3.9 ft.)

Maximum Barrel Diameter: 72mm (2.8 in.)

Length at Infinity: 148mm (5.8 in.)

Weight: 725g (25.6 oz.)

Coating: Multicoated

Accessory Size: 62mm

Lens Cap Size: 62mm

Specifications subject to change without notice. Weights and lengths vary slightly depending on lens mount.

Vivitar Corporation
Santa Monica, CA 90406 USA

Subsidiaries/Tochtergesellschaften/Filiales/Sucursales

Vivitar Japan Ltd.: Tokyo, Japan/Japon/Japón

Vivitar Photo-Elektronik GmbH: Hofheim/Ts., FRG/BDR/RFA

Vivitar Canada Ltd.: Mississauga, Canada/Kanada/Canadá

Vivitar France S.A.: Rungis, France/Frankreich/Francia

Vivitar U.K. Ltd.: Abingdon, England/Angleterre/Inglaterra

Vivitar Europe, Inc.: Mijdrecht, Netherlands/Niederlande/
Hollande/Holanda

9/79 Printed in Japan/Imprimé au Japon/Impreso en el Japón
3000626