


Vivitar®

**75-300mm f5.6 Close
Focusing Zoom Lens**

Owner's Manual

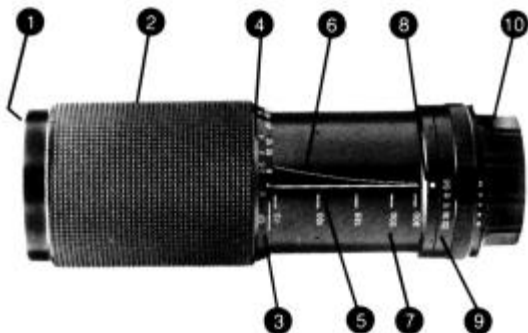

- 1. Accessory Thread:** Accepts 58mm threaded filters, lens hoods and other accessories.
- 2. Zoom/Focus Ring:** Rotate the zoom/focus ring to focus; slide forward or backward along the lens barrel to change focal length. Always double check focus after changing focal length.
- 3. Close-Focus Index Mark:** Closest focusing distance for achieving maximum reproduction ratio.
- 4. Distance Scales:** White = feet.
Green = meters.
- 5. Distance Index Line:** Read distance scales against this reference point.
- 6. Infrared Focus Line:** Infrared radiation focuses on a different plane than normal light. When using black and white infrared film, focus normally, note the distance on the distance scales and then rotate the zoom/focus ring until the noted distance aligns with the infrared focus line. Normal focusing methods are applicable for use with color infrared film.

7. Focal Length Scale
8. Aperture Index Dot
9. Aperture Ring and Scale
10. **Lens Mount:** Your new Vivitar zoom is designed to fit your camera with ease and precision. Simply slide the zoom/ focus ring to the 75mm position and attach the lens (holding the lens barrel) to your camera as you would your normal lens.

Automatic Diaphragm Control

The automatic diaphragm allows picture composition and focusing with the diaphragm "wide open" (at maximum aperture). The diaphragm automatically stops down to the pre-selected aperture at the moment of exposure and immediately re-opens when exposure is completed.

EE Coupled Lenses

Your 75-300 zoom lens is compatible with EE coupled lens systems.

Canon mount lenses have a click stop at the green "O" for EE operation. The aperture ring may be set and removed from this position by depressing the lock button beneath the green "O."

Konica mount lenses have an aperture ring that locks with a positive "click" when placed in the green "AE" position. To remove from AE operation, press the AE lock button and turn the aperture ring to the specific f-stop you want.

On Minolta mount lenses the minimum aperture setting (f22) is engraved in green. When using Minolta cameras equipped to do so in the shutter priority mode, your lens must be set at this minimum aperture position.

Using the Close Focus Feature

To use the Close Focus feature of your Vivitar 75-300, first slide the zoom/focus ring to the 75mm position. Next rotate the zoom/focus ring until it stops at the yellow "CF" position. Move your camera and lens until the image is in sharpest focus (which will be when your subject is approximately 335 mm, or 13.2 inches, from the front of your lens). At this Close Focus position your lens will provide a reproduction ratio of 1:5. This means that the size of the image on the film is $\frac{1}{5}$ life size. The magnification range of your Vivitar 75-300 in normal, non-Close Focus use is from 1:20 at 75mm to 1:5.5 at 300mm.

Note: Do not attempt to change focal lengths from 75mm when the zoom/focus ring is set at the Close Focus position. Rotate the zoom/focus ring back until it has cleared the Close Focus position and then you will be able to slide the ring backwards or forwards to change focal length.

Lens Care

1. We suggest keeping a Skylight 1A or UV filter mounted on your lens at all times to protect the front element from dirt and abrasions.
2. Protect your lens from dust by keeping front and rear lens caps in place when not in use.
3. Keep your lens clean, using a soft brush, an air blower or lens tissue and lens cleaning fluid. Never use any material or cloth likely to cause abrasions on the lens coating or front element surface.
4. Always store your lens in a cool, dry place. In humid environments, use the Silica Gel packet supplied with every lens.

Specifications

Focal length: 75-300mm

Optical construction: 13 elements in 9 groups,
multicoated (VMC)

Aperture range: f5.6 - f22 (f16 for Konica
mount)

Angle of acceptance: 32° - 8°20'

Min. focusing distance from film plane: 560 mm
(22 ")

Max. reproduction ratio: 1:5 at 75mm in CF
position

Accessory size: 58mm thread

Max. barrel diameter: 67.2 mm (2.64")

Length at infinity: 169.8 mm (6.68")

Weight: 712 g (25.1 ozs.)

Specifications subject to change without notice. Length and weight
may vary slightly depending upon lens mount.

Vivitar Corporation
Santa Monica, CA 90406 USA

Subsidiaries

Vivitar Japan Ltd., Tokyo, Japan

Vivitar Photo-Elektronik GmbH, Hofheim/Ts., FRG

Vivitar Canada Ltd., Mississauga, Canada

Vivitar Belgium S.A., Brussels, Belgium

Vivitar France S.A., Rungis, France

Vivitar U.K. Ltd., Abingdon, England

Vivitar Europe, Inc., Mijdrecht, Netherlands